

FERRARA 150 Ceiling Mounted Luminaire


Project Name

Address

City

State

ZIP

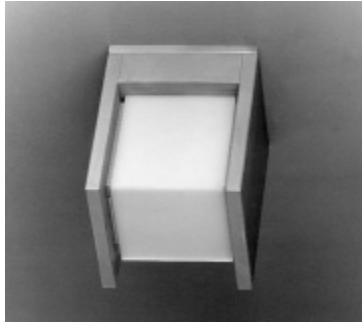

Dimensions



FERRARA 150 Ceiling Mounted Luminaire

Luminaire = 8 lbs

www.hessamerica.com

Type	Model	Watt	Lamp	Volt	Mounting	Finish	Option
	FR150	13 18	CF - Compact Fluorescent	2 - 120 7 - 277	A - Surface Mount	SG - Silver Grey CC - Custom Color	N - None

Ordering Information


Comment

Specifications are subject to change without notification

HessAmerica . P.O. Box 28 . Gaffney, SC 29342 . Phone: 864-487-3535 . Fax: 864-487-3175 . www.hessamerica.com



Specifications

- DESCRIPTION** Surface mounted luminaire for interior and exterior applications where contemporary styling is desired.
- HOUSING** Two 6060 aluminum alloy sidewalls attach to opposite sides of the square cast aluminum base with concealed hardware. Sidewalls are 0.60" thick and have two ribs attached to the inner side to provide positive alignment of the lens. Matte acrylic cubic lens with integral flange has two white acrylic panels bonded to the outer surface to align the lens assembly to the luminaire. Two cast aluminum fascia elements seal the lens assembly to the single piece EPDM gasket on the base and are secured with countersunk stainless steel screws. Luminaire mounts to surface over single gang switch box with factory supplied hardware and wall anchors. All hardware is stainless steel.
- OPTICS** Lamp is positioned within the matte acrylic cylindrical lens providing soft diffused illumination.
- ELECTRICAL** Compact fluorescent high frequency electronic ballast shall be Class P and Outdoor Type 1 rated. Ballast shall have a minimum high power factor rating of 90% and a minimum starting temperature of -20°F (-30°C) at nominal line voltage $\pm 10\%$. Ballast shall be UL Listed. Lamp sockets are 75w-600v rated.
- LAMPING**
- | | | |
|---------|---------------------|---------------------|
| Wattage | 13 | 18 |
| Source | Compact Fluorescent | Compact Fluorescent |
| Lamp | CFQ13W/G24q | CFTR18W/G24q |
| Bulb | PL-C | PL-T |
| Base | G24q-1 | GX24q-2 |
- Lamp is included.
- FINISH** Housing is cleaned ultrasonically prior to painting. Standard finish is finely textured matte silver grey metallic. Special colors available on request.
- WARRANTY** Limited product warranty period is three years. Lamp and ballast shall carry the respective manufacturer's limited warranty.
- CERTIFICATION**  Listed for Wet Locations.

Specifications are subject to change without notification