




Dimensions

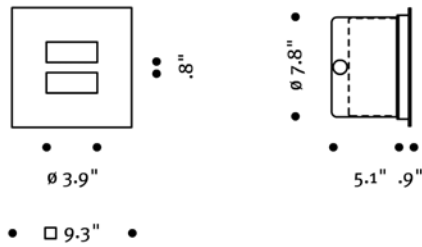

N A N O DS Recessed Wall Luminaire

Luminaire Weight = 8 lbs

www.hessamerica.com


Type	Model	Watt	Lamp	Volt	Mounting	Finish	Option
	NA235DS	18	CF - Compact Fluorescent	2 - 120 7 - 277	R - Recessed	SS - Stainless Steel	30K - 3000K Lamp 35K - 3500K Lamp 41K - 4100K Lamp

Ordering Information

Comment

Specifications are subject to change without notification

Specifications

- DESCRIPTION** Recessed luminaire for exterior and interior wall mounted applications where contemporary styling is desired.
- HOUSING** Brushed stainless steel faceplate is 0.16" thick and machined with geometric pattern to form the aperture. Matte acrylic lens with exposed sidewall is 0.78" thick and machined with matching geometric pattern to fit flush with the front of the faceplate. Faceplate is offset from wall surface. Lens assembly is sealed to the housing with single-piece closed cell silicone gasket and secured with concealed stainless steel hardware. Spun aluminum housing is anodized and finished in white paint on the interior. High-grade aluminum alloy ring is press-fit securely into the housing and serves as the mounting surface for the lens assembly. Luminaire installs into recessed formed aluminum rough-in housing.
- Rough-in housing assembly includes adjustable protective cover to compensate for variations in finished wall thicknesses up to 1.97". Rough-in housing assembly is suitable for interconnected wiring and may be preshipped upon request. All hardware is stainless steel.
- OPTICS** Lamp is positioned within the housing producing signal-like effect through the geometric apertures on the faceplate. Exposed lens sidewall produces a corona-like effect around the luminaire.
- ELECTRICAL** Compact fluorescent high frequency electronic ballast shall be Class P and Outdoor Type 1 rated. Ballast shall have a minimum high power factor rating of 90% and be capable of reliable starting to 0° F (-18° C) at nominal line voltage. Total harmonic distortion shall be less than 10%. G24q-2 lamp socket is 75w-600v rated.
- LAMPING**
- | | |
|---------|---------------------|
| Wattage | 18 |
| Source | Compact Fluorescent |
| Lamp | CFQ18W/G24q |
| Bulb | PL-C |
| Base | G24q-2 |
- Lamp is included. Specify lamp color temperatures of 3000 K, 3500 K, or 4100 K.
- MOUNTING** Cast aluminum wall bracket mounts over single gang switchbox and is secured to surface in four places with factory supplied socket head lag screws and anchors. Optional adapter plate for mounting over 4" octagon box is available upon request.
- FINISH** Standard finish is brushed stainless steel.
- WARRANTY** Limited product warranty period is three years. Lamp and ballast shall carry the manufacturer's limited warranty.
- CERTIFICATION**  Listed for Wet Locations. Suitable for use in exterior, interior, and poured concrete walls.

Specifications are subject to change without notification