

VARELLO 300

Wall Mounted Luminaire

.hess

DESCRIPTION

The simple cylindrical form of VARELLO blends subtly with a broad range of architecture. The heavy wall extruded aluminum housing, fitted top and bottom with precision-machined lens rings, provides subtle direct and indirect illumination. Matte acrylic window highlights the luminaire and serves as an illuminated focal point. Top and bottom lenses are matte acrylic. Luminaire is finished in finely textured paint. Hardware is stainless steel.



Date: _____ Type: _____ Catalog Number: _____

Project Name: _____

ORDERING INFORMATION

LUMINAIRE						
MODEL	LAMP	COLOR TEMPERATURE	VOLT	MOUNTING	FINISH	OPTION
VL300-LED	LED-Standard Output	WW-3000k	UNV-120-277V	W-Wall Mount	SG-Silver Grey	DIM-0-10v dimming
		NW-4000k			DG-Dark Grey	N-None
					GG-Graphite Grey	
					BLK-Matte Black	
					BRZ-Dark Bronze	
					CC-Custom RAL Color	

SPECIFICATIONS

HOUSING

Cylindrical housing is machined from 6060 extruded aluminum alloy tubing. Semi-cylindrical front lens fits flush to the housing. Matte acrylic lens is sealed to the housing with one-piece closed cell silicone gasket and secured with six captive flathead countersunk screws. Upper and lower lens rings are precision machined from 6060 aluminum and sealed to the housing with one-piece die-cut closed cell silicone gaskets. Matte acrylic upper and lower lenses are bonded to the lens rings with silicone. Luminaire with cast aluminum bracket mounts to wall surface with factory-supplied wall anchors and hardware. All hardware is stainless steel.

OPTICS

Two linear LED boards centered within the housing direct light through the front satine' acrylic lens to produce a soft diffused light distribution. Upper and lower lenses emit soft glow for ambience and visual interest.

ELECTRICAL

Integral high-power factor electronic LED driver supplies 700mA drive current to LED modules with input voltage range from 120v to 277v at 50/60Hz. Power consumption is 13 watts.

DELIVERED LUMEN OUTPUT / BUG RATING

3000K: 611 lumens / B0-U3-G1

4000K: 672 lumens / B0-U3-G1

NOTE: Due to rapid and continuous advances in LED technology, LED luminaire data is subject to change without notice and at the discretion of HessAmerica. Consult factory for current technical data.

FINISH

Housing is cleaned ultrasonically prior to painting. Standard finishes are finely textured matte silver grey metallic, dark grey, graphite grey, matte black, or dark bronze. Special colors available on request.

CERTIFICATION: CSA Certified for Wet Locations

WARRANTY

Limited product warranty period including LEDs is five years. Driver shall carry the manufacturer's limited warranty.




DIMENSIONS

All dimensions are shown in inches unless otherwise noted.



MOUNTING DETAILS

All dimensions are shown in inches unless otherwise noted.

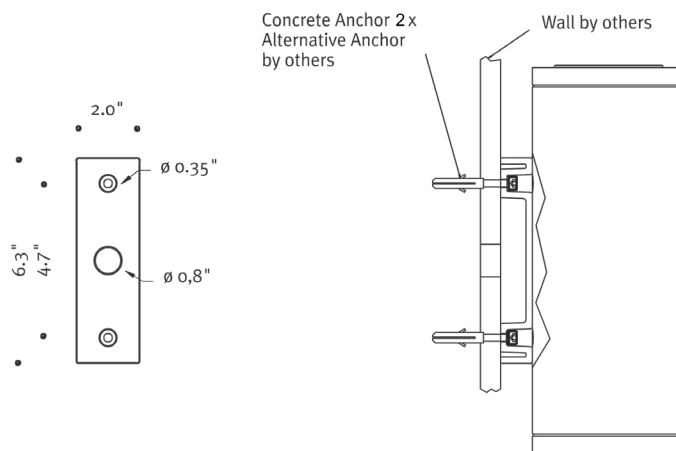

VARELLO 300

Wall Mounted Luminaire

.hess

