

FIDENZA 150


Wall Mounted Luminaire

.hess

DESCRIPTION

Vertical planes with a slim profile define FIDENZA, adding an unobtrusive linear accent to contemporary interiors and outdoor spaces. The fabricated aluminum luminaire is fully shielded and includes an integral driver with minimal power consumption. FIDENZA emits zero uplight and is suitable for LEED lighting zones 1 through 4 and is Dark Sky compliant. All hardware is stainless steel.

PROTECTED BY
 **PRIMAR**®

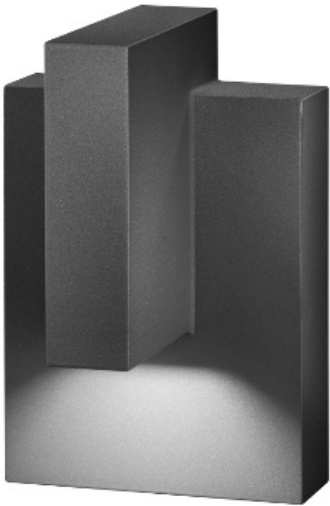

Date: _____	Type: _____	Catalog Number: _____
Project Name: _____		

ORDERING INFORMATION

LUMINAIRE				
MODEL	CCT	VOLTAGE	FINISH (Primar®)	OPTION
FD150W Fidenza 150	30K 3000K	UNV 120-277V	DG Dark Grey	AP Adapter Plate For Mounting Over 3.5" to 4" Octagonal Box
	40K 4000K		GG Graphite Grey	
			SG Silver Grey	
			BL Black	
			DB Dark Bronze	
			CC Custom RAL Color	

SPECIFICATIONS

HOUSING

Vertically oriented planar housing and wall bracket are fabricated from 6060 aluminum. Flat lens is clear acrylic. All hardware is stainless steel.

OPTICS

LED light engine with electrical disconnect is to flush mounted to the aluminum plate inside the housing. Six LEDs with individual refractive lenses are positioned within the cylindrical housing providing asymmetric distribution with zero uplight.

ELECTRICAL

Input voltage to universal high power factor LED driver is 120v through 277v AC, 50/60 Hz. Drive current to LEDs is 350 mA. Power consumption is 8 watts.

LED DELIVERED LUMENS / SYSTEM WATTS / BUG RATING

3000K: 129 LMS / B0-U1-G

4000K: 155 LMS / B0-U1-G0

NOTE : Due to rapid and continuous advances in LED technology, LED luminaire data is subject to change without notice and at the discretion of HessAmerica. Consult factory for current technical data.

MOUNTING

Standard:

Luminaire is supplied with stainless steel mounting bracket and miniature junction box. Stainless steel mounting bracket is secured to the junction box with two stainless steel screws, providing a mounting surface for the luminaire. The luminaire engages the mounting bracket and is secured with a single stainless steel screw from the top, concealed from normal viewing angles. Miniature junction box may be pre-shipped in advance on request.

Adapter Plate for 3.5" or 4" Octagon Box:

Machined aluminum adapter plate with universal hole pattern mounts to 3.5" or 4" octagon box with two screws. Stainless steel luminaire mounting bracket and decorative machined aluminum cover plate mounts over the adapter plate, providing a mounting surface for the luminaire. Luminaire engages with the stainless steel mounting bracket and is secured with single stainless steel screw from the top of the luminaire housing. Decorative cover plate is finished to match the luminaire.

FINISH

Housing is cleaned ultrasonically prior to painting. Standard finishes are finely textured matte silver grey metallic, dark grey, graphite grey, matte black, or dark bronze. Special colors available on request.


WEIGHT: 6 lbs

WARRANTY


Limited product warranty period including the LEDs is five years. Driver shall carry the manufacturer's limited warranty.

DIMENSIONS

All dimensions are shown in inches unless otherwise noted.

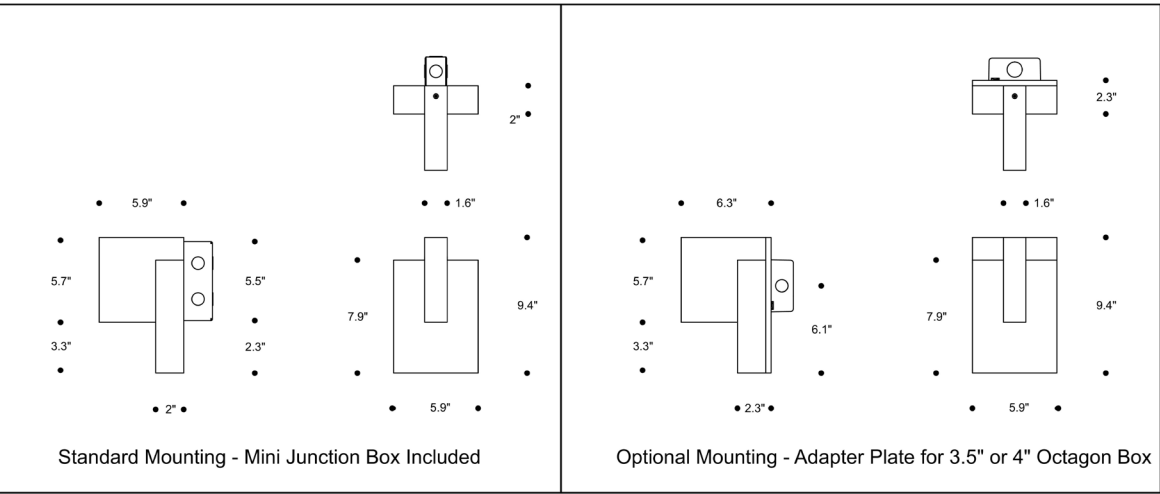

MOUNTING DETAILS

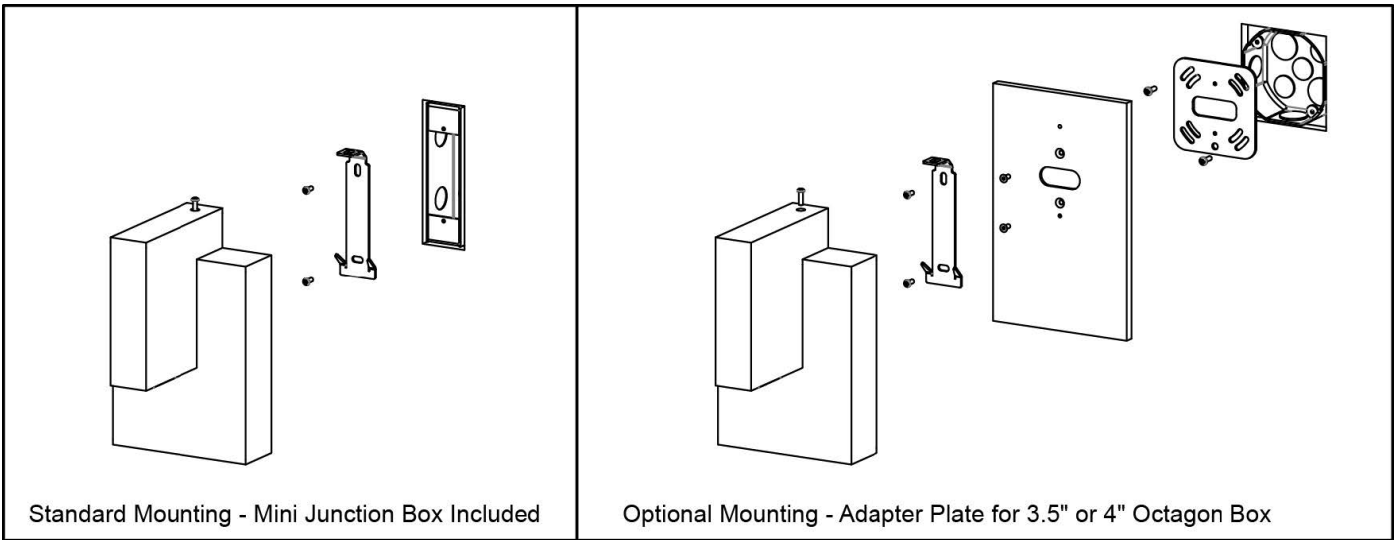

EXTERIOR APPLICATION

