

VARELLO 485LW

Wall Mounted Luminaire

.hess

DESCRIPTION

The simple cylindrical form of VARELLO blends subtly with a broad range of architecture. The heavy wall extruded aluminum housing, fitted top and bottom with precision-machined lens rings, provides subtle direct and indirect illumination. Matte acrylic window highlights the luminaire and serves as an illuminated focal point. Top and bottom lenses are clear tempered glass. Luminaire is finished in finely textured paint. Hardware is stainless steel.



PROTECTED BY
PRIMAR®



Date: _____ Type: _____ Catalog Number: _____

Project Name: _____

ORDERING INFORMATION

LUMINAIRE						
MODEL	CCT	CONTROL	VOLTAGE	OPTIC- DOWN	OPTIC- UP	FINISH (Primar®)
VL485LW Varello 485L	30K 3000K	ON-OFF On-Off	UNV 120-277v	NB 13° Down	NB 13° Up	DG Dark Grey
	40K 4000K	DIM 0-10v Dimming		MB 27° Down	MB 27° Up	GG Graphite Grey
				WB 59° Down	WB 59° Up	SG Silver Grey
				N None	N None	BL Black
						DB Dark Bronze
						CC Custom RAL Color

Custom options are available; consult factory for assistance via phone at (864) 487-3535 ext. 258 or via email at DesignServices@EXP-Brands.com.

SPECIFICATIONS

HOUSING

Cylindrical housing is machined from 6060 extruded aluminum alloy tubing. Upper and lower lens rings are precision machined from 6060 aluminum and sealed to the housing with one-piece die-cut closed cell silicone gaskets. Upper and lower tempered glass lenses are sealed to the lens rings with one-piece closed cell silicone gasket. Luminaire with cast aluminum bracket mounts to wall surface with factory-supplied wall anchors and hardware. All hardware is stainless steel.

OPTICS

Optics include single CoB LED with reflector and diffusing lens. Available distributions include narrow 13°, medium 27°, or wide 59° beam spreads.

ELECTRICAL

Electronic LED driver supplies 350mA drive current to LED module with input voltage range from 120v through 277v at 50/60Hz. Power consumption is 28 watts. Optional 0-10v DC dimming is available on request.

DELIVERED LUMENS PER LIGHT SOURCE (UP OR DOWN) / CRI = 80

3000K

13° Beam / 1554 Lumens

27° Beam / 1491 Lumens

59° Beam / 1451 Lumens

4000K

13° Beam / 1658 Lumens

27° Beam / 1592 Lumens

59° Beam / 1547 Lumens

NOTE : Due to rapid and continuous advances in LED technology, LED luminaire data is subject to change without notice and at the discretion of HessAmerica. Consult factory for current technical data.

FINISH

Standard finishes are finely textured matte silver grey metallic, dark grey, graphite grey, matte black, or dark bronze. Special colors available on request.

CERTIFICATION

CSA Certification

WARRANTY

Limited product warranty period including the LEDs is five years. Driver shall carry the manufacturer's limited warranty.


CUSTOMIZE YOUR **EX**PERIENCE.

At Experience Brands, we believe every space deserves unique lighting elements. We proudly specialize in crafting solutions that reflect your personal vision. Our expert team is here to collaborate with you to design and implement customized features that elevate your environment.


Ready to Get Started? Email us at: DesignServices@exp-brands.com

DIMENSIONS

All dimensions are shown in inches unless otherwise noted.

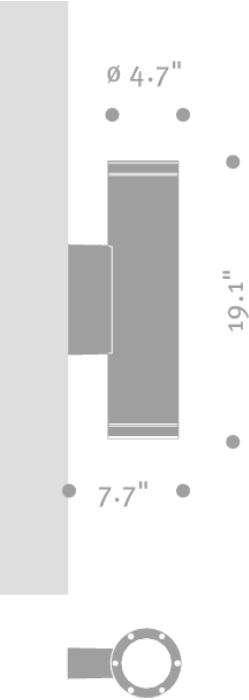

MOUNTING DETAILS

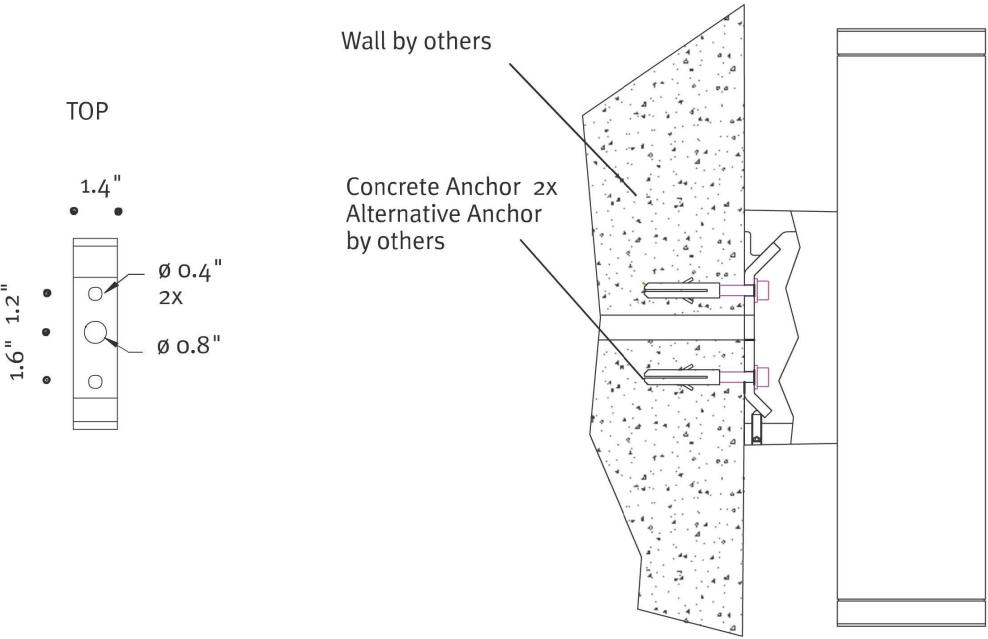

VARELLO 485LW

Wall Mounted Luminaire

.hess

APPLICATION

