

RIVA 650W

Wall Mounted Luminaire

.hess

DESCRIPTION

Wall mounted luminaire is precision-machined from billet aluminum, then satin anodized. The translucent matte acrylic lens provides diffused illumination. Inverted tapered cast aluminum housing is finished in finely textured paint. All hardware is stainless steel.

PROTECTED BY
PRIMAR®



Date: _____	Type: _____	Catalog Number: _____
Project Name: _____		

ORDERING INFORMATION

LUMINAIRE					
MODEL	CCT	CONTROL	VOLTAGE	FINISH	OPTION
RV650W RIVA 650	30K 3000K	ON-OFF On-Off	UNV 120-277V	BL Black	AP Adapter Plate for Mounting Over 4" Octagonal Box
RV650WG RIVA 650 with 12° Tilt	40K 4000K	DIM 0-10v Dimming		DB Dark Bronze	
	A Amber			DG Dark Grey	
	B Blue			GG Graphite Grey	
	G Green			SG Silver Grey	
	R Red			CC Custom RAL Color	

Consult factory for availability of custom options. Factory assistance is available via phone at (864) 487-3535 ext. 258 or via email at DesignServices@EXP-Brands.com.

SPECIFICATIONS

HOUSING

One-piece luminaire base is precision-machined from 6060 billet aluminum, then satin anodized. Cylindrical matte acrylic lens with two guide pins twists and locks onto luminaire base and is secured with three button head cap screws. One-piece closed cell silicone gasketing provides a weather-tight seal. Luminaire base fastens to the one-piece cast aluminum tapered housing with three recessed setscrews and is sealed with one-piece closed cell silicone gasket. LED driver mounts to plate on the underside of the housing and housed in the top of the bracket. All hardware is stainless steel. RV650WG wall bracket has 12° tilt away from wall surface. Single CoB LED is positioned within the cylindrical matte acrylic lens producing symmetrical distribution.

ELECTRICAL

LED driver consumes 12.5 watts and is integral to the inverted taper wall bracket. Input voltage to driver is 110v through 277v AC with 50-60 Hz. Driver shall be UL recognized.

LED DELIVERED LUMENS / SYSTEM WATTS / BUG RATING

3000K: 1387 LUMENS / B0-U4-G1

4000K: 1495 LUMENS / B0-U4-G1

NOTE : Due to rapid and continuous advances in LED technology, LED luminaire data is subject to change without notice and at the discretion of HessAmerica. Consult factory for current technical data.

MOUNTING

Tapered cast aluminum housing with integral arm mounts over single gang switchbox and is secured to surface with four factory supplied socket head lag screws and anchors. Optional adapter plate to mount standard luminaire over 4" octagon box is available upon request.

FINISH

Luminaire base is satin anodized aluminum. Standard finishes for cast aluminum housing are finely textured dark grey, graphite grey, silver grey, black, or dark bronze. Special colors available on request.

WEIGHT

6 Pounds

CERTIFICATION

NRTL Certified

WARRANTY

Limited product warranty period including the LEDs is five years. Driver shall carry the manufacturer's limited warranty.



RV650WG

DIMENSIONS

All dimensions are shown in inches unless otherwise noted.


RV650W



RV650WG



MOUNTING DETAILS

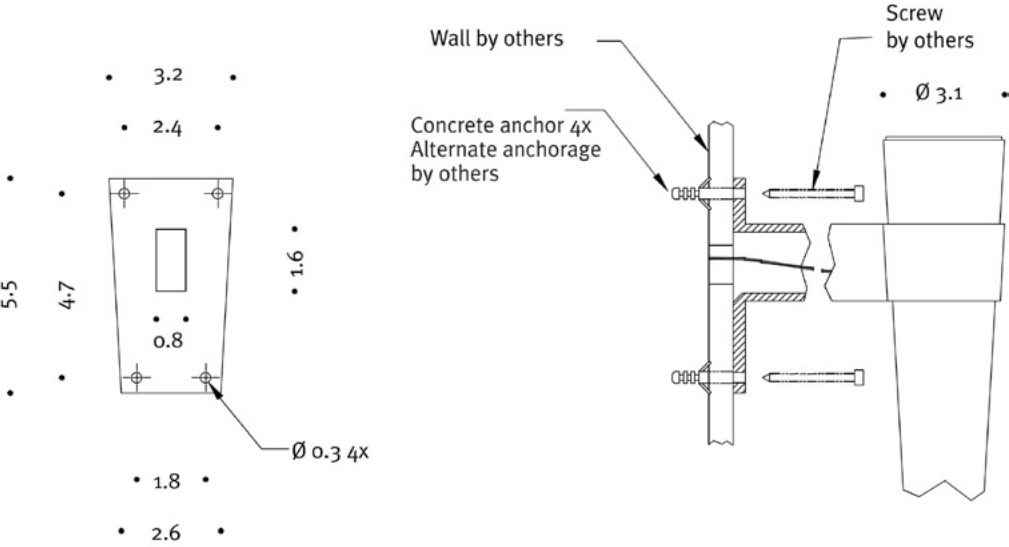

Standard Mounting

APPLICATION IMAGES



CUSTOMIZE YOUR **EX**PERIENCE.

At Experience Brands, we believe every space deserves unique lighting elements. We proudly specialize in crafting solutions that reflect your personal vision. Our expert team is here to collaborate with you to design and implement customized features that elevate your environment.

Ready to Get Started? Email us at: DesignServices@exp-brands.com