

# PORTAL EXIT

## Illuminating Waymarking Bollard


.hess

### DESCRIPTION

The PORTAL EXIT bollard delivers an exterior rated architectural solution for visual guidance and messaging. Suitable for outdoor applications ranging from rooftop pool decks and gardens to courtyards, the slender rectangular form integrates comfortably into a variety of architecture. The extruded aluminum bollard is available with green or red letters. Custom signage, logos, or patterns may also be incorporated on request. Concealed mounting plate assembly delivers a clean, flangeless appearance. All hardware is stainless steel. CSA Certified for Wet Locations and UL924 compliant.

PROTECTED BY

**PRIMAR®**

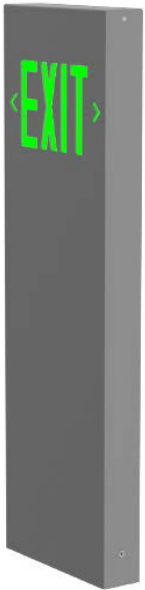

Date: \_\_\_\_\_ Type: \_\_\_\_\_ Catalog Number: \_\_\_\_\_

Project Name: \_\_\_\_\_

### ORDERING INFORMATION

| LUMINAIRE                             |                  |                                             |            |                 |                        |                                 |
|---------------------------------------|------------------|---------------------------------------------|------------|-----------------|------------------------|---------------------------------|
| MODEL                                 | CONFIGURATION    | DIRECTIONAL INDICATOR                       | LETTERING  | VOLTAGE         | FINISH                 | OPTION                          |
| PTL1000E<br>39.4" Portal Exit Bollard | S<br>Single Face | L<br>Left Chevron                           | G<br>Green | UNV<br>120-277v | BL<br>Black            | TVSS20<br>20KV Surge Suppressor |
|                                       |                  | R<br>Right Chevron                          | R<br>Red   |                 | DB<br>Dark Bronze      |                                 |
|                                       |                  | D<br>Left and Right Chevrons                |            |                 | DG<br>Dark Grey        |                                 |
|                                       |                  | N<br>No Chevron                             |            |                 | GG<br>Graphite Grey    |                                 |
|                                       | D<br>Double Face | LR<br>Left/Right Chevron (One per Side)     |            |                 | SG<br>Silver Grey      |                                 |
|                                       |                  | D<br>Left and Right Chevrons (Two per Side) |            |                 | CC<br>Custom RAL Color |                                 |
|                                       |                  | N<br>No Chevrons                            |            |                 |                        |                                 |
|                                       |                  |                                             |            |                 |                        |                                 |
|                                       |                  |                                             |            |                 |                        |                                 |
|                                       |                  |                                             |            |                 |                        |                                 |
|                                       |                  |                                             |            |                 |                        |                                 |

Custom options are available; consult factory via phone at (864) 487-3535 ext. 258 or via email at [DesignServices@EXP-Brands.com](mailto:DesignServices@EXP-Brands.com).

### MOUNTING KIT *(Required, Ordered Separately)*

**PTL1000E-MK**  
Mounting Kit with 4x Ø0.5" X 15" X 3" Anchor Bolts and Paper Template

## SPECIFICATIONS

### HOUSING

Outdoor rated ext bollard is fabricated from high strength 6061-T6 extruded aluminum alloy with nominal thickness of 0.187" and cross-section of 12" x 3". Overall height is 39.4". Top plate for access to light engine is machined aluminum with beveled edges and secured with tamper-resistant countersunk screws. Six inch tall lettering is available in green or red to meet local or state codes. All hardware is stainless steel.

### OPTICS

Low power LEDs on flexible film behind a matte acrylic lens with colored film provide illumination of exit sign lettering. Bollard is available with green or red lettering.

### ELECTRICAL

UL recognized electronic LED driver is housed in a weather-proof enclosure and supplies 350 mA drive current to the LEDs. Universal driver accepts 120v through 277v input voltage at 50/60 Hz. Power consumption is 9 watts.

### MOUNTING

Bollard mounts to concealed mounting plate assembly. Mounting plate assembly consists of fabricated aluminum mounting base which installs onto four ½" x 15" x 3" diameter hot-dip galvanized anchor rods embedded in concrete foundation provided by others. Bollard secures to the mounting assembly with two recessed setscrews. Contact factory for alternate mounting methods.

### CERTIFICATION

CSA/US Certified for Wet Locations. Complies with UL924 standards.

### WARRANTY

Limited product warranty period including LEDs is five years. Driver shall carry the manufacturer's limited warranty.


## CUSTOMIZE YOUR **EX**PERIENCE.

At Experience Brands, we believe every space deserves unique lighting elements. We proudly specialize in crafting solutions that reflect your personal vision. Our expert team is here to collaborate with you to design and implement customized features that elevate your environment.

**Ready to Get Started?** Email us at: [DesignServices@exp-brands.com](mailto:DesignServices@exp-brands.com)

# .hess

All dimensions are shown in inches unless otherwise noted.

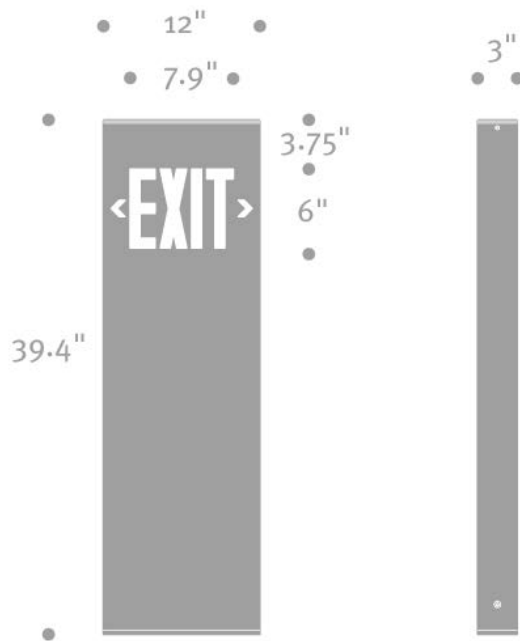

All dimensions are shown in inches unless otherwise noted.

