


SEDI Q

Recessed Wall Luminaire

.hess

DESCRIPTION

The unique styling of Sedi Q recessed wall luminaire features a stepped cast aluminum faceplate to transform any wall into a functional 3-dimensional element. Featuring optics with a concealed diffuse acrylic lens, the recessed luminaire produces soft, low-brightness illumination without glare. The robust cast aluminum housing seamlessly integrates into a formed stainless steel backbox and allows for easy interconnected wiring. The backbox may be pre-shipped in advance. All hardware is stainless steel. Standard Primar finishes are matte silver grey metallic, graphite grey, dark grey, black, or dark bronze. Custom RAL colors are also available upon request. Luminaire is suitable for installation in exterior, interior, and poured concrete walls.

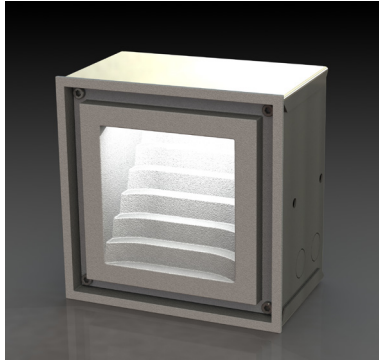

PROTECTED BY



Date: _____ Type: _____ Catalog Number: _____

Project Name: _____



ORDERING INFORMATION

LUMINAIRE						
MODEL	OUTPUT	CCT	CONTROL	VOLTAGE	FINISH	OPTION
SEDIQ Sedi Q	SO Standard Output	27K 2700K	DIM 0-10v Dimming	UNV 120-277v	DG Dark Grey	TVSS20 20KV Surge Suppressor
	HO High Output	30K 3000K			GG Graphite Grey	
		35K 3500K			SG Silver Grey	
		40K 4000K			BL Black	
		A True Amber (590 to 595nm)			DB Dark Bronze	
					CC Custom RAL Color	

Custom options are available; consult factory for assistance via phone at (864) 487-3535 ext. 258 or via email at DesignServices@EXP-Brands.com.

MOUNTING (Required, Ordered Separately)

SEDIQ-RBB
Recessed Backbox for Sedi Q

SEDIQ-MK
Mounting Kit for Sedi Q; For Mounting Within Interior Walls with 2x4 Wood or Metal Construction



www.HessAmerica.com
For other Experience® Brands companies, please visit www.ExperienceBrandsUSA.com.
In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear online are the most recent ones available. *Consult the factory to verify current status of BAA/TAA/BABAA compliance.

SPECIFICATIONS

HOUSING

The cast aluminum faceplate measures 6.6" w x 6.6" h and is secured to the cast aluminum housing with four captive bolts. Silicone gasketing provides a weather-tight seal to the housing when closed. The luminaire housing with a depth of 3.9" installs into a stainless steel recessed backbox with two threaded rods and fasteners for positive retention within the backbox. Faceplate is flush to the wall with minimal projection when installed. Overall depth of the recessed backbox is 4". The luminaire and recessed backbox are ordered separately. Optional mounting kit for mounting the luminaire within interior walls with 2x4 wood or metal construction in lieu of the recessed back box. Luminaire is IP65 rated and ADA compliant.

OPTICS

Optics consist of the LED light engine with metal core PCB positioned above a horizontal matte acrylic lens. Light is directed downwards through the diffused lens onto the stepped detailing of the faceplate. Outer sides of the stepped geometry are angled inwards to project light to the opposite lateral side of the luminaire for increased fill close to the wall between luminaires while parallel stepped geometry on the faceplate projects light outward from the luminaire. CRI is 80 with standard CCTs of 2700K, 3000K, 3500K, or 4000K. True amber LEDs (between 590 to 595 nm) are also available.

ELECTRICAL

Standard output model consumes 8.4 watts. High output model consumes 16.8 watts. Both models feature dimming capability for 0-10v, TRIAC, or ELV protocols as standard. Dimming wires may be terminated if on/off operation only is desired. An optional inline 20KVA rated surge suppressor for installation in the rough-in box is available on request.

DELIVERED LUMENS / BUG RATING

Standard Output:

2700K: 264 lumens / B0-U2-G0
3000K: 270 lumens / B0-U2-G0
3500K: 275 lumens / B0-U2-G0
4000K: 284 lumens / B0-U2-G0

High Output:

2700K: 528 lumens / B0-U2-G0
3000K: 540 lumens / B0-U2-G0
3500K: 551 lumens / B0-U2-G0
4000K: 568 lumens / B0-U2-G0

NOTE:

Due to rapid and continuous advances in LED technology, LED luminaire data is subject to change without notice and at the discretion of HessAmerica. Consult factory for current technical data.

FINISH

Standard PRIMAR finishes are finely textured dark grey, graphite grey, silver grey, black, or dark bronze. Special RAL colors available on request.

CERTIFICATION


CSA Certification for Wet Locations

WARRANTY

Limited product warranty period including LEDs is five years. Driver shall carry the manufacturer's limited warranty.

DIMENSIONS

All dimensions are shown in inches unless otherwise noted.

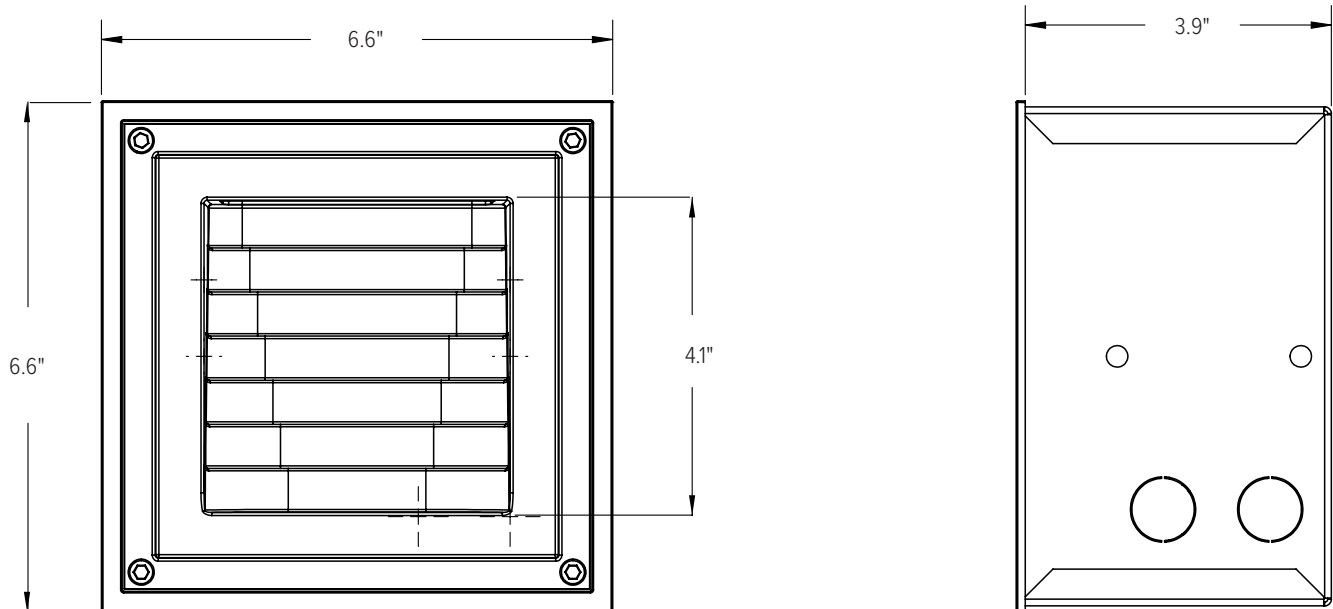

CUSTOMIZE YOUR EXPERIENCE.

At Experience Brands, we believe every space deserves unique lighting elements. We proudly specialize in crafting solutions that reflect your personal vision. Our expert team is here to collaborate with you to design and implement customized features that elevate your environment.

Ready to Get Started? Email us at: DesignServices@exp-brands.com