

RENO

Illuminating Column

.hess

DESCRIPTION

RENO's linear form adds a simple accent to contemporary architecture. Rectangular column is fabricated from aluminum extrusions and panels. Top mounted reflector allows for easy relamping. Matte translucent lenses generate softly diffused illumination, while effectively highlighting the profile. All hardware is stainless steel.



PROTECTED BY

PRIMAR®



Date: _____ Type: _____ Catalog Number: _____

Project Name: _____

ORDERING INFORMATION

LUMINAIRE						
MODEL	HEIGHT (FEET)	CCT	CONTROL	VOLTAGE	FINISH	OPTION
REN3200 Reno Column	10 10' Rectangular Column	30K 3000K	DIM 0-10v Dimming	UNV 120-277v	BL Black	TVSS20 20KV Surge Suppressor
		40K 4000K			DB Dark Bronze	GFCI- GFCI Receptacle: Specify Using Ordering Information Below.
					DG Dark Grey	
					GG Graphite Grey	
					SG Silver Grey	
					CC Custom RAL Color	

Custom options are available; consult factory for assistance via phone at (864) 487-3535 ext. 258 or via email at DesignServices@EXP-Brands.com.

MOUNTING KIT *(Required, Ordered Separately)*

RENO-MK

Mounting Kit with (4) 0.75" X 17" X 3" Anchor Bolts and Paper Template

GFCI - *(Optional, Add GFCI catalog number to accessory portion of luminaire catalog number.)*

RECEPTACLE/BOX	RECEPTACLE TYPE	MOUNTING
GFCI GFCI Receptacle Box	1 GFCI (2 GFCI Outlets)	A Semi-Recessed
	2 GFCI + USB-C (2 GFCI Outlets + 2 USB-C Charging Ports)	B Surface Mount
	3 GFCI + USB-A + USB-C (2 GFCI Outlets + 1 USB-A + 1 USB-C Charging Ports)	

EXPERIENCE®
BRANDS

www.HessAmerica.com

For other Experience® Brands companies, please visit www.ExperienceBrandsUSA.com.

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear online are the most recent ones available. *Consult the factory to verify current status of BAA/TAA/BABAA compliance.

SPECIFICATIONS

HOUSING

Rectangular column is fabricated from 0.2" nominal wall, 6060 aluminum extrusions and aluminum sheet. Hand hole cover is plasma cut with kerf not to exceed 1/8" and includes triangular tamper-resistant locking device. Machined aluminum top cap provides access to LED engine with reflective optics located at top of column. Top cap is secured to column with four captive stainless steel socket head cap screws and is sealed to the housing with one-piece die-cut silicone gasket. Square lenses on main width of column and narrow rectilinear lenses on adjacent sides are textured matte acrylic.

OPTICS

Top mounted CoB LED and medium beam reflector projects light downward and outward through four lenses on the bollard. Interior of housing is painted white to provide even illumination through all four lenses. Two square lenses provide accenting, while two rectilinear lenses provide primary illumination.

ELECTRICAL

Electronic LED driver supplies 700mA drive current to LED modules with input voltage range from 120v to 277v at 50/60Hz with total power consumption is 40 watts. 0-10v dimming available on request. Electronic driver is housed within a weatherproof enclosure that is accessed via the hand hole.

DELIVERED LUMEN OUTPUT/POWER CONSUMPTION/BUG RATING

Standard Output: 40 Watts

3000K - 2515 lumens / B1-U4-G2

4000K - 3119 lumens / B1-U5-G2

MOUNTING

Luminaire with internal flange mounts to four 3/4" x 17" x 3" galvanized steel anchor bolts. Nominal column height is 10.5'.

WEIGHT

128 lbs

FINISH

Standard finishes are finely textured matte silver grey metallic, dark grey, graphite grey, matte black, or dark bronze. Special colors available on request.

CERTIFICATION

CSA/US Certified for Wet Location.

WARRANTY

Limited product warranty period including LEDs is five years. Driver shall carry the manufacturer's limited warranty.


CUSTOMIZE YOUR **EX**PERIENCE.

At Experience Brands, we believe every space deserves unique lighting elements. We proudly specialize in crafting solutions that reflect your personal vision. Our expert team is here to collaborate with you to design and implement customized features that elevate your environment.

Ready to Get Started? Email us at: DesignServices@exp-brands.com

DIMENSIONS

All dimensions are shown in inches unless otherwise noted.

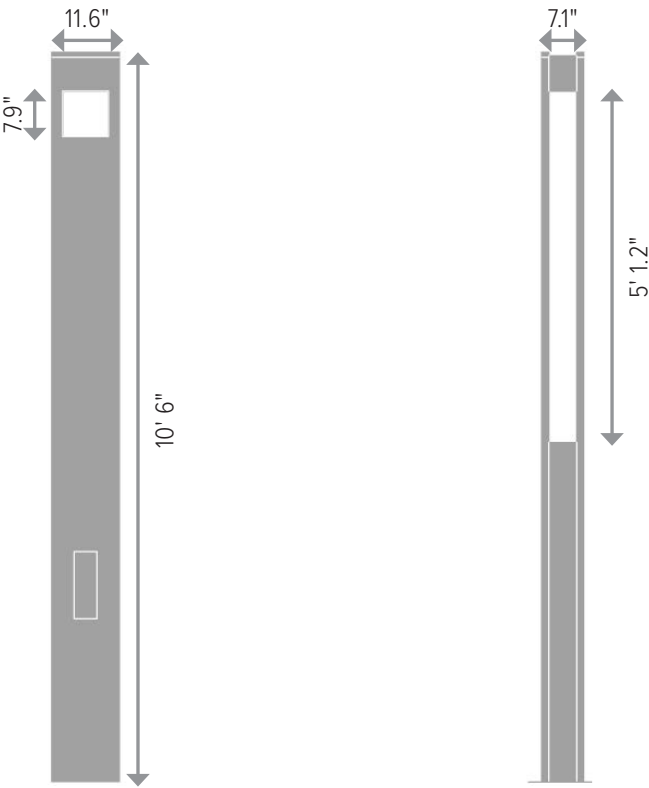

MOUNTING DETAILS

All dimensions are shown in inches unless otherwise noted.

